

### HARDWARE FEATURES

- Urethane coated envelope
- Textured powder coated enclosure
- Multi-position, self-supporting hinged lid
- Optimized noise suppression enclosure
- Ease-of-use single button operation
- Casters for easy installation

### SOFTWARE FEATURES

- Intelligent cycle times
- Variable detergent dosing

### PRODUCT SPECIFICATIONS

#### SIZE AND WEIGHT

- Envelope: 12" Diameter x 10" H  
(31 cm x 26 cm)
- Volume of parts should not exceed 1/3<sup>rd</sup> of envelope
- Machine Footprint (Closed door):  
– 54.3" L x 28.3" W x 39.4" H  
(137 cm x 72 cm x 100 cm)
- Weight: 400 lbs. empty; 415 lbs. full

#### ELECTRICAL

##### US

- Voltage: IEC 120V
- Amperage: 15A
- Connector: NEMA 5-15P

##### EU

- Voltage: 230V
- Amperage: 20A
- Connector: CEE 7/7


#### CONSUMABLES

- Abrasive and polishing media
- PLM-001-SURF Detergent

#### SAFETY FEATURES

- Emergency stop
- Auto power down
- Compliant with all OSHA regulations

#### MATERIALS AND TECHNOLOGIES

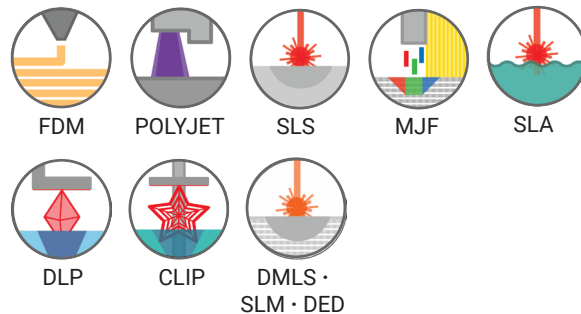

#### POSTPROCESS TECHNOLOGIES INC.

2495 Main Street, Suite 615, Buffalo NY 14214 USA  
info@postprocess.com +1.866.430.5354

#### POSTPROCESS TECHNOLOGIES INTERNATIONAL

535 Route des Lucioles 06560 Sophia Antipolis, France  
+33 (0)4 22 32 68 13