

SUPPORT REMOVAL

HARDWARE FEATURES

- Digital interface
 - Customizable settings
 - Set and save programs for future runs
- Piezo-electric ultrasonics
- In-line one micron absolute filters for extended detergent life
- Stainless steel envelope
- Hinged envelope lid
- Process drain rack
- Magnetically driven pump
- Multi-configuration fixture
- Casters for easy installation

SOFTWARE FEATURES

- Patent-pending AUTOMAT3D™ platform
- Variable temperature: 86-145°F (30 – 63°C)
- Programmable cycle time
- Proprietary *Agitation Algorithms*

PRODUCT SPECIFICATIONS

SIZE

- Envelope: 18" L x 18" W x 18" H
46 cm x 46 cm x 46 cm
- Machine footprint:
 - 34.75" L x 43.5" W x 59.75" H
88 cm x 110 cm x 152 cm
- Approximate weight: 400 lbs. empty; 750 lbs. full

CONSUMABLES

- Capacity: 40 Gallons (151 Liters)
- Detergent: PLM-101-SUB for Polyjet
PLM-402-SUB for SLA, CLIP
PLM-201-SUB for FDM

SAFETY FEATURES

- Emergency stop
- Auto power down
- Compliant with all OSHA regulations
- **CE**



ELECTRICAL

US

120V MODEL

- 120V, 20A, Connector: NEMA L5-20P
- Dual agitation; includes 1,000 W ultrasonics

240V MODEL


- 240V, 20A, Connector: NEMA L6-20P
- Dual agitation; includes 1,750 W ultrasonics

EU

230 V MODEL

- 230V, 20A, Connector: Hubbell HBL332P6W
- Dual agitation; includes 1,750 W ultrasonics

MATERIALS AND TECHNOLOGIES

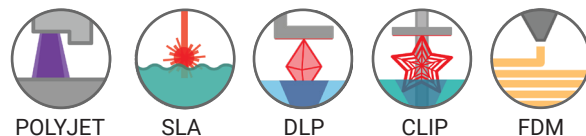

POSTPROCESS TECHNOLOGIES INC.

2495 Main Street, Suite 615, Buffalo NY 14214 USA
info@postprocess.com +1.866.430.5354

POSTPROCESS TECHNOLOGIES INTERNATIONAL

535 Route des Lucioles 06560 Sophia Antipolis, France
+33 (0)4 22 32 68 13