

SUPPORT & RESIN REMOVAL

SOFTWARE FEATURES

- Patent-pending AUTOMAT3D™ platform
- Variable temperature: 86-145°F (30 – 63°C)
- Programmable cycle time
- Proprietary *Agitation Algorithms*
- Recipe storage and recall
- Precision control of process parameters
- Preventative maintenance features

HARDWARE FEATURES

- Digital interface
- Stainless steel envelope
- Hinged envelope lid
- Process drain rack
- Magnetically driven pump
- Multi-configuration fixture
- Casters for easy installation




PRODUCT SPECIFICATIONS

SIZE

- Envelope: 18" L x 18" W x 18" H
46 cm x 46 cm x 46 cm
- Machine footprint: 34.75" L x 43.5" W x 59.75" H
88 cm x 110 cm x 152 cm
- Approximate weight: 400 lbs. empty; 750 lbs. full

MATERIALS AND TECHNOLOGIES

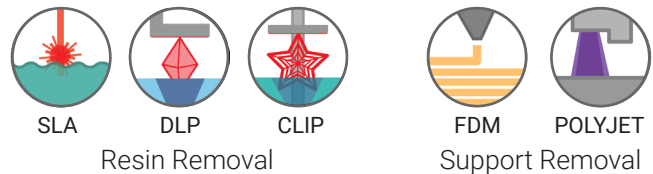

ELECTRICAL

**NORTH AMERICA
DEMI UHP1 MODEL**

- 120V, 20A, Connector: NEMA L5-20P
- Dual agitation; includes heater & 1,000 W ultrasonics

DEMI XXP1 MODEL

- 120V, 20A, Connector: NEMA L5-20P

DEMI UHP2 MODEL

- 240V, 20A, Connector: ABB332P6W
- Dual agitation; includes heater & 1,750 W ultrasonic

EUROPE

DEMI UHP3 MODEL

- 230V, 20A, Connector: ABB332P6W
- Dual agitation; includes heater & 1,750 W ultrasonics

DEMI XXP3 MODEL

- 230V, 20A, Connector: ABB332P6W

CONSUMABLES

- Capacity: 40 Gallons (151 Liters)
- Detergent: PLM-101-SUB for Polyjet
PLM-201-SUB for FDM
PLM-403-SUB for SLA, CLIP, DLP

SAFETY FEATURES

- Emergency stop
- Auto power down
- 

POSTPROCESS TECHNOLOGIES INC.

2495 Main Street, Suite 615, Buffalo NY 14214 USA
info@postprocess.com +1.866.430.5354

POSTPROCESS TECHNOLOGIES INTERNATIONAL

535 Route des Lucioles 06560 Sophia Antipolis, France
+33 (0)4 22 32 68 13